CAPILLAR SYSTEM SOLUTION

PRESBLOCK World Patents

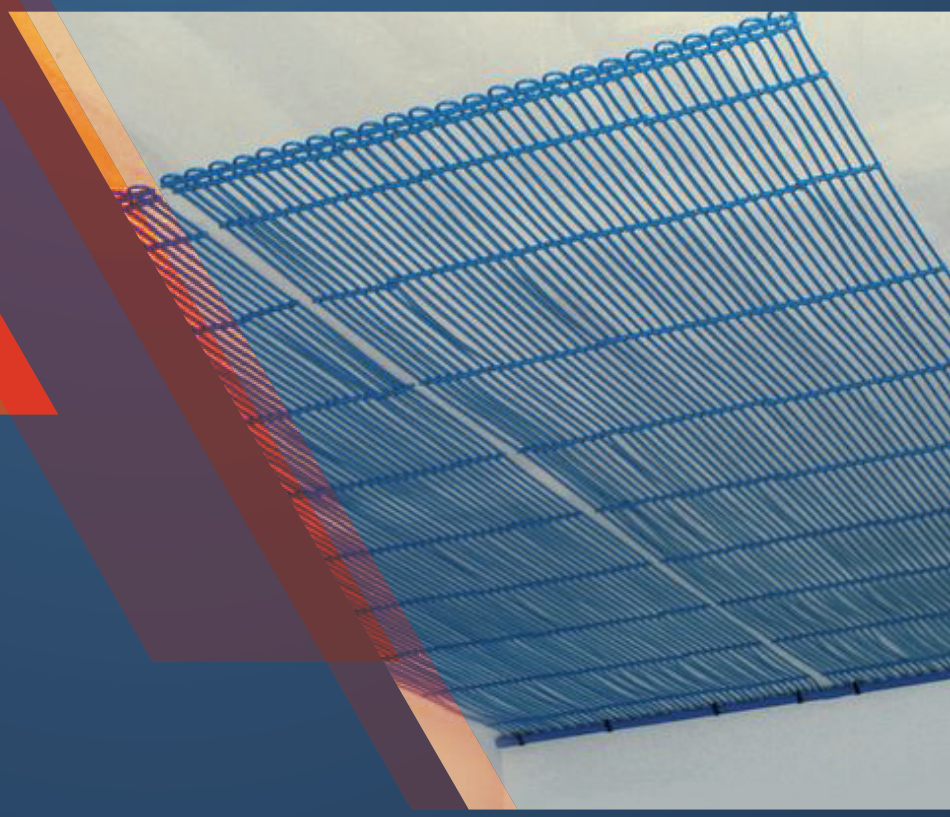

ULTRA BLOCK MANIFOLD

PRESBLOCK

INDUSTRIAL UFH SOLUTION

RAW MATERIALS

- Peroxidic EPDM
- PA 6,6 GF30
- AISI
- Brass

TECHNICAL DATASHEET

Fluids accepted	water, glycol solutions
% glycol max	50%
Working temperature	5÷60 °C
Max temperature	90 °C at 3 bar
Working pressure	0÷6 bar
Max pressure	10 bar
Burst pressure	> 15 bar at room temperature
Max torque to adjust F2" inlet	100 N•m
Kv flow coefficient when fully open	8000 l/h

ASSEMBLING HOOK UP

PLUG RTEM-T2

SUPPLY RETURN RTEM-2

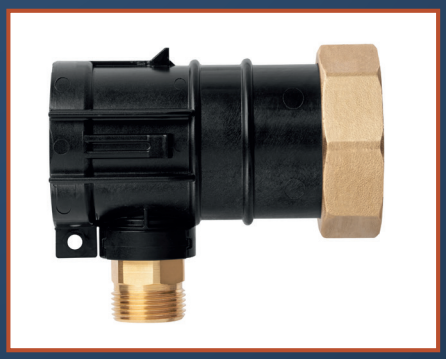

INLET RTEM-F2